

SABRE YACHTS - SABRE 28
INSTRUCTIONS FOR DISCONNECTING THE
THROTTLE LEVER RETURN SPRING ON VOLVO MD7A

1. Locate the throttle lever control mechanism on the starboard side of the engine. (See Fig. 1)
2. There are two levers. One is the engine stop, the other is the throttle control. (See Fig. 2)
3. Locate the throttle lever return spring.
4. It is presently hooked around the throttle control lever at Position A, Fig. 2.
5. Remove the spring from Position A and allow it to snap down to Position B, such that it is hooked around the idle adjusting screw.

FIG. 1

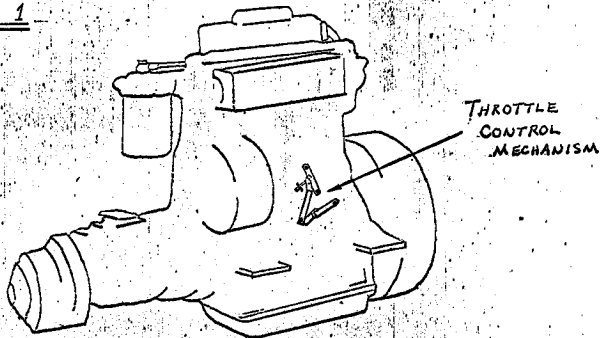


FIG. 2

